

---

**Congratulations with your purchase and the choice for**



**Roadtrip 130 and Outback 140  
HARDCOVER Rooftop Tents  
Instruction manual Koala Creek®**

Please read this manual carefully before mounting and using your rooftop tent



- 
- In case of question please ask your preferred Koala Creek® dealer.
  - KOALA CREEK® is a registered trade brand owned by TWISTIM, Outdoor in motion.

**TWISTIM, Outdoor in motion.**  
Schuttersstraat 26B  
6191 RZ Beek  
The Netherlands  
[www.koalacreek.info](http://www.koalacreek.info)



---

## ***YOUR ADVENTURE STARTS HERE: with Koala Creek®***

### **UNPACKING YOUR KOALA CREEK® ROOFTOP TENT:**

You receive your rooftop tent on a handy lorrie, packed in a sturdy carton box.  
So no troubles during transport, and the lorrie is awesome for home storage.

**In the big carton is your rooftop tent.** *And in your rooftop tent are several items packed:*

Also a small bag with 2 Springrods (for rear door); 4 sets roofbar mounts ; tools.

**In the small carton is your rooftop tent ladder and this instruction book.**

**Please open the cartons carefully to prevent cutting and damaging the tent and ladder**

Open the hardcover and take the mounting set bag and springrod bag out.

Close it again. Attention to put all fabric inside of rubber.

Mount the rooftop tent on the roofbars with the 4 plates and 8 sliders

Take the ladder and mount it (Choose 1 of 3 positions) - correct positioning from the ladder (Lower from above)

Open the rooftop tent and mount the 2 spring rods.

Enjoy your sleep!



#### **Mount the rooftop tent on the roofbars with the 4 plates and 8 sliders**

**(When needed spray sliders with teflon or silicone lubricant)**

*When standard supplied do not fit you will have to buy others.*

*Before mounting you supply the 8 pcs. M8 bolts with some anti seize pasta, to prevent coldweld with the nuts.*

*When used for rental or oft taken of the car we suggest to use standard 8.8 galvanised mounting material.*

*The supplied nuts are selfretaining (with plastic ring), also good for anti theft as it takes some time to dismount!*

***Never use these nuts more often then one time!***



Lift the rooftop tent and put 2 alloy sliders with bolts in an alloy C bar and push them between the roofbars.  
Do the same for the other side from the rooftop tent.

Put from all the 4 sides another slider with bolt through the alloy C bars, and mount black plastic end caps.

Mount the 4 plates and use holes as close to the roofbars as possibly, with a washer and selfretaining nut.

Put the rooftop tent in the position you need (lift possibly aligned to each side) and tighten nuts.

When tightening nuts, push the mounting plate with your finger down so bolt keeps fixes in alloy slider.

Tighten firmly and check the rooftop tent is sturdy mounted to bars.


***On the next page you see preferred position of roofbars.***

---


Position and distribution of the roof racks. Ensure uniform load bearing.



-With 2 Bars



-With 3 Bars

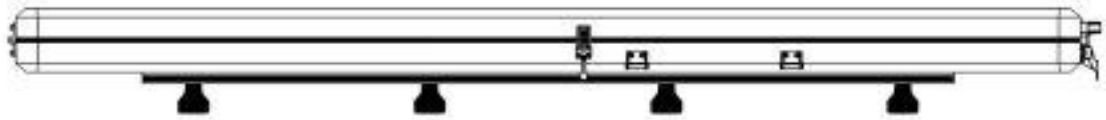

-With 4 Bars



- 1

Roof bar is option.

Open all four latches as shown in the figure.
- 2


Lift the handle up and open the tent.

Take out the expansion ladder and install it as shown in the figure.
- 3

Take out two spring wire hooks and support the rain fly as shown in the figure.
- 4

Take out two spring wire hooks and support the rain fly as shown in the figure.

5

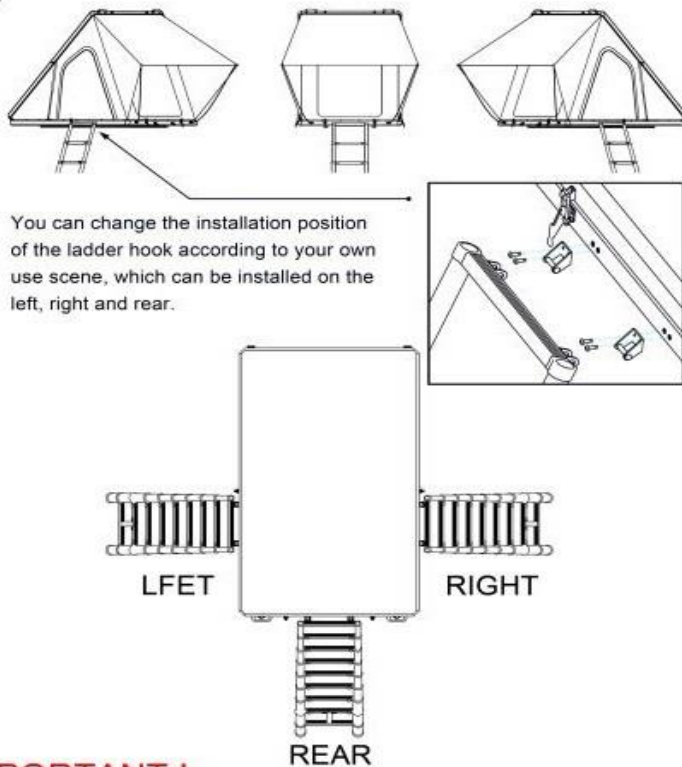

You can change the installation position of the ladder hook according to your own use scene, which can be installed on the left, right and rear.



### IMPORTANT !

**When closing the tent take care that all fabric is inside the rubbers from the hardcover. Use the elastic to pull fabric together, and use the extra strap to keep the lid in position when closed to 15 cm.**

#### **CAUTIONS - WARNINGS**

1. Please do not move the vehicle with open Rooftop Tent roof tent.
2. The maximum speed with the mounted Rooftop tent is 120km/h
3. Please use the ladder according to the ladder instruction.
4. The maximal load of the tent base is 300kg. Equally divided over the Rooftop tent base.  
Depending on the vehicle recommendations.
5. The fabric of tent is made of poly and cotton mix. This makes it waterproof and good resistant to mould. Hence it can be stowed in a wet condition for a short period of time. However, the roof tent should be completely dried and ventilated after every trip within 24 hours, otherwise mould can form.  
(Take care of a dry Rooftop tent when stored for a longer period, the best is storage with open cover)
6. When raining make sure that the inclination of the tent helps water to flow off.
7. **Ensure regularly that all mounting materials are in good condition and properly tightened.**  
**Check after first 30 and 100 Km. and before and during each trip.**

#### **WARRANTY AND CONDITION**

A Koala Creek® Rooftop tent is covered by 24 months warranty effective from date of purchase (for first owner and not on wear parts)

The problem occurs under normal used circumstances where the Rooftop tent has been used according to instructions in this manual.

The problem is found to be caused by defective or faulty materials, workmanship or manufacturing process.

Original invoice has to be taken over to the Koala Creek® preferred dealer.

Claims that are not covered by above regulations are not covered by warranty.

However, Koala Creek® will do always the utmost to help you,

***In case of questions or problem please ask first your preferred Koala Creek® dealer. He is specialised and always willing to help.***